




F75

POA



Variable trolling switch

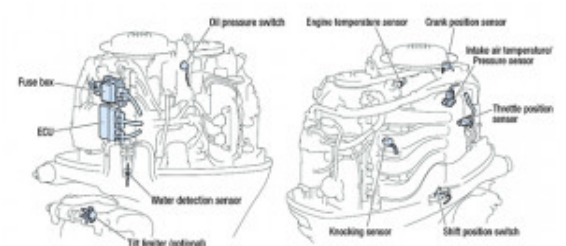

## Specifications

### Boat Details

Price	POA	Boat Brand	Yamaha
Model	F75	Length	0.00
Year	2025	Category	Boat Engines and Outboards
Hull Style		Hull Type	
Power Type	Power	Stock Number	F75LB
Condition	New	State	New South Wales
Suburb	MULGRAVE	Engine Make	

## Finance Available

From \$ p/w<sup>^</sup>. Please call 1300 787 288 for more information.

## Description

With its advanced 16-valve, four-valve-per cylinder, Single Overhead Camshaft (SOHC) design and large 1.8 Litre displacement, the F75

### Terms & Condition

This weekly repayment estimate is provided by Stratton Finance Pty Ltd (Australian Credit Licence No. 364340) ("Stratton"). Stratton is a finance broker. This repayment is calculated with an interest rate of % p.a. over a term of months. The interest rate is indicative of the rates on offer through Stratton's lending panel. The repayment estimate applies to the price shown. The price shown may not include other additional costs such as stamp duty, government fees and other charges payable in relation to the item. This estimate should be used for information purposes only and is not an offer of finance on particular terms. Credit fees, service fees and charges may apply. Credit to approved applicants only. A quote, details of all fees and charges may be obtained by contacting Stratton via [stratton.com.au](http://stratton.com.au) or calling 1300 955 600.

---

delivers the ultimate combination of unbridled power and refined performance for the mid-range outboard market. The F75's lightweight powerhead configuration, refined shaping of the combustion chamber and lean fuel burn technology, means this outboard is extremely fuel efficient, while also delivering an exceptionally smooth and quiet riding experience. This outboard is compatible with Yamaha's comprehensive range of Command Link gauges and NMEA2000 compliant, meaning you can share engine information with third party multi-function displays, GPS and fish finder systems.

Technical Specification

HeightL: 516 [20.3]

WeightL: 162 X: 166

Engine4-Stroke, 16 Valve SOHC In-line 4 Cylinder

Displacement1832.0

Bore81 X 88.9

Max RPM5000 - 6000

LubricationWet sump

FuelEFI

IgnitionTCI

StarterElectric

Alternator12V - 35A with rectifier regulator

OperationMechanical Control (Optional Tiller Handle Available)

TiltPower Trim & Tilt

GaugesOptional

Network GaugesOptional

Gear Ratio2.15 : 1

Lpd Switch1

---

## Engine Details

Horse Power

75